

JG10 Rec'd PCT/PTO 07 JAN 2002

FORM PTO-1390 US DEPARTMENT OF COMMERCE REV. 5-93PATENT AND TRADEMARK OFFICE TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371		ATTORNEYS DOCKET NUMBER P01,0563 U.S. APPLICATION NO. (if known, see 37 CFR 1.5) 10/030258
INTERNATIONAL APPLICATION NO. PCT/EP00/06273	INTERNATIONAL FILING DATE 04 JULY 2000	PRIORITY DATE CLAIMED 06 JULY 1999
TITLE OF INVENTION METHOD FOR THE SWITCHOVER TO STANDBY OF TRANSMISSION FACILITIES IN PACKET-ORIENTED TRANSMISSION		
APPLICANT(S) FOR DO/EO/US Joachim CHARZINSKI		
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:		
1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371. 2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371. 3. <input checked="" type="checkbox"/> This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay. 4. <input checked="" type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date. 5. <input checked="" type="checkbox"/> A copy of International Application as filed (35 U.S.C. 371(c)(2)). a. <input checked="" type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau). b. <input type="checkbox"/> has been transmitted by the International Bureau. c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US) 6. <input checked="" type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2)). 7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. §371(c)(3)) a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau). b. <input type="checkbox"/> have been transmitted by the International Bureau. c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired. d. <input checked="" type="checkbox"/> have not been made and will not be made. 8. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)). 9. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). 10. <input checked="" type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)). Items 11. to 16. below concern other document(s) or information included: 11. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 C.F.R. 1.97 and 1.98; (PTO 1449, Prior Art, Search Report, 04 References). 12. <input checked="" type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 C.F.R. 3.28 and 3.31 is included. (SEE ATTACHED ENVELOPE) 13. <input checked="" type="checkbox"/> Amendment "A" Prior to Action and Appendix "A". <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment. 14. <input checked="" type="checkbox"/> A substitute specification and substitute specification mark-up. 15. <input checked="" type="checkbox"/> A change of address letter attached to the Declaration. 16. <input checked="" type="checkbox"/> Other items or information: a. <input checked="" type="checkbox"/> Submission of Drawings, 1 sheet, Figures 1-2. b. <input checked="" type="checkbox"/> EXPRESS MAIL #EL 843743047 US dated January 7, 2001		

45,877
Registration Number

BOX PCT
IN THE UNITED STATES DESIGNATED/ELECTED OFFICE
OF THE UNITED STATES PATENT AND TRADEMARK OFFICE
UNDER THE PATENT COOPERATION TREATY--CHAPTER II

PRELIMINARY AMENDMENT A
PRIOR TO ACTION

5
APPLICANT(S): Joachim CHARZINSKI
ATTORNEY DOCKET NO.: P01,0563
INTERNATIONAL APPLICATION NO: PCT/EP00/06273
INTERNATIONAL FILING DATE: 04 JULY 2000
INVENTION: METHOD FOR THE SWITCHOVER TO STANDBY OF TRANSMISSION
FACILITIES IN PACKET-ORIENTED TRANSMISSION

10 Assistant Commissioner for Patents,
Washington, D. C. 20231

Sir:

15 Applicants herewith amend the above-referenced PCT application, and
request entry of the Amendment prior to examination on the United States
Examination Phase.

IN THE CLAIMS:

On substitute page 6:

replace line 1 with --WHAT IS CLAIMED IS:--;

20 Please replace original claims 1-6 with the following rewritten claims 1-6,
referring to the mark-ups in Appendix A.

1. (Amended) A method for the switchover to standby of transmission facilities
in packet-oriented transmission, comprising:

25 transmitting a multiplicity of packets belonging to different connections in
accordance with an Internet Protocol (IP packets) via at least one of a transmission

facility and a redundant transmission facility arranged redundantly to the transmission facility;

including a prioritization information item with each packet in a part of the packet header;

5 conducting a packet either via the transmission facility or the redundant transmission facility, as determined by the prioritization information item; and

conducting a packet determined by the prioritization information item for the transmission facility to the redundant transmission facility when there is a disturbance of the transmission facility.

10

2. (Amended) The method as claimed in claim 1, wherein the prioritization information item is included in the TOS field of the packet header defined in the differentiated services concept.

15

3. (Amended) The method as claimed in claim 1, wherein only the packets with a lower priority are conducted via the redundant transmission facility.

4. (Amended) The method as claimed in claim 1, further comprising:
discarding packets with a lower priority in the switchover to standby case.

20

5. (Amended) The method as claimed in claim 1, further comprising:
changing the prioritization based on a capacity utilization determination of the transmission facility.

25

6. (Amended) The method as claimed in claim 1, wherein the transmission facility and redundant transmission facility are constructed as junction lines.


REMARKS

30 The present Amendment revises the specification and claims to conform to United States patent practice, before examination of the present PCT application in the United States National Examination Phase. Pursuant to 37 CFR 1.125 (b),

applicants have concurrently submitted a substitute specification, excluding the claims, and provided a marked-up copy. All of the changes are editorial and applicant believes no new matter is added thereby. The amendment, addition, and/or cancellation of claims is not intended to be a surrender of any of the subject matter of those claims.

Early examination on the merits is respectfully requested.

Submitted by,

 (Reg. No. 45,877)

Mark Bergner
Schiff Hardin & Waite
Patent Department
6600 Sears Tower
233 South Wacker Drive
Chicago, Illinois 60606-6473
(312) 258-5779
Attorneys for Applicant

CUSTOMER NUMBER 26574

[with] **transmitting** a multiplicity of packets belonging to different connections[~~, which are transmitted~~] in accordance with an Internet Protocol (IP packets) [~~and which are transmitted~~] via **at least one of** a transmission facility[~~-(L1)~~] and [~~possibly~~] a **redundant** transmission facility[~~-(L2)~~] arranged redundantly [~~thereto~~], **to the transmission facility**;

conducting a packet[is conducted] either via the transmission facility [(L1)]or the redundant transmission facility[(L2) arranged redundantly thereto], as determined by the prioritization information item[;], and[~~in that in the case of disturbances of~~]

2. **(Amended)** The method as claimed in claim 1, ~~[characterized in that the part of the packet header in which]~~**wherein** the prioritization information item is included ~~[is]~~**in** the TOS field **of the packet header** defined in the differentiated services concept.

4. **(Amended)** The method as claimed in [one of the preceding claims, characterized in that the] **claim 1, further comprising:**

5. **(Amended)** The method as claimed in [one of the preceding claims, characterized in that] **claim 1, further comprising:**

changing the prioritization [~~can be changed as determined by the~~]based on
a capacity utilization determination of the transmission facility[~~(L1)~~].

- 5 6. (Amended) The method as claimed in [~~one of the preceding claims,~~
characterized in that]claim 1, wherein the transmission [~~facilities~~]facility and
redundant transmission facility are constructed as junction lines[~~(L1, L2)~~].

GR 99 P 2253

- 1 -

Description:

Method for the switchover to standby of transmission facilities in packet-oriented transmission.

5

The invention relates to a method according to the preamble of claim 1.

10 To be able to transmit information between a transmitting and receiving facility, duplicated transmission facilities are provided in the state of the art. As a rule, these are constructed as junction lines. In this arrangement, the information is transmitted via only one of these junction lines (active junction line) as a rule, whereas the remaining junction line is arranged
15 as redundant junction line. If the active junction line fails, the information is transmitted via the redundant junction line. This procedure ensures that the information can be reliably transmitted even if one junction line fails.

20 This general concept is also applied in the transportation of packet-oriented traffic. As a rule, however, no traffic, or only little traffic, is transmitted via the redundantly arranged junction line, so that it is possible to switch over without losses at any time in the case of a switchover to standby. As a
25 result, however, the transmission capacity is more or less unused on the redundantly arranged junction line. Such a situation must be avoided, particularly for packets which are transmitted in accordance with an Internet Protocol (IP packets).

30 The invention is based on the object of demonstrating an approach of how a redundancy of transmission facilities can be made efficient even with IP traffic

SECRET

GR 99 P 2253

- 2a -

accordance with an Internet Protocol (IP packets). The IP packets are supplied to a filtering device F via the

junction line L_0 . In this case, a selection is made by means of a marking (still to be specified in greater detail later) about which of the subsequent junction lines L_1 , L_2 the relevant IP packet is to be supplied to. Once the selection has been made, the relevant IP packet is first written into a buffer P_1 or P_2 , respectively, allocated to the junction line. The buffers P_1 and P_2 are associated with a switching device S via which the IP packets are supplied to the junction lines L_1 , L_2 . According to the present exemplary embodiment, junction line L_1 is intended to be the active junction line and junction line L_2 is intended to be the redundant junction line.

The switching device S is driven by a controller not shown in greater detail in Figure 1. According to the present exemplary embodiment, the switching device S is set in such a manner that the IP packets stored in the upper buffer P₁ are supplied to junction line L₁ and the IP packets stored in the lower buffer P₂ are supplied to junction line L₂. If then the active junction line L₁ fails, the switching device S is driven in such a manner that the connections of the buffer P₁ to junction line L₁ and of the buffer P₂ to junction line L₂ are broken and, instead, a connection between buffer P₁ and junction line L₂ is established. This means that the IP packets stored in buffer P₁ are now transmitted via junction line L₂. The IP packets stored in buffer P₂ are discarded.

25 The IP packets have an information part I and a packet header PK.
The packet header PK is used for accommodating the destination
address and control information, among other things. As a part of
this control information, a field TOS is provided which has a
30 width of 8 bits. In the prior art, this field is used

GR 99 P 2253

- 3a -

within the concept of "Differentiated Services" for including a prioritization information item

with IP packets. In case of an overload, the IP packets with lower priority are then discarded, for example due to this information item.

- 5 According to the invention, it is then provided to distribute the individual IP packets to buffers P_1 , P_2 by evaluating the TOS field. The evaluation is done in the filtering device F and is performed by means of a predeterminable threshold value. This means that if the value stored in the TOS field is greater than
10 this predetermined threshold value, this IP packet is to be considered as having a higher priority than those IP packets having a value below this threshold value.

- As a result of the evaluation, a distinction is thus made between
15 IP packets with higher priority and IP packets with lower priority. The IP packets with higher priority are conducted via junction line L_1 , whereas the IP packets with lower priority are supplied to junction line L_2 . This then also provides an indirect prioritization of the junction lines L_1 , L_2 . In the case of a
20 fault, only those IP packets are thus forwarded which are to be considered as having higher priority. The IP packets with lower priority are discarded.

- In Fig. 1, the IP packets are distributed to the two junction
25 lines L_1 , L_2 by means of a rigid allocation. A further development of the method can be seen in

- Fig. 2. According to this, an adaptive method is provided here. Thus, junction line L_1 is supplied with exactly such a number of IP packets with higher priority so that a predetermined target
30 capacity utilization is achieved on this junction line. The IP packets with lower priority are conducted to junction line L_2 . In the case of a switchover due to a fault in junction line L_1 , they are then lost.

- 4a -

The device designated by ST in Fig. 2 is intended for controlling these processes. The threshold value is here set in accordance with the determination of the capacity utilization of junction line L_1 ,

Patent claims

1. A method for the switchover to standby of transmission facilities in packet-oriented transmission,
5 with a multiplicity of packets belonging to different connections, which are transmitted in accordance with an Internet Protocol (IP packets) and which are transmitted via a transmission facility (L_1) and possibly a transmission facility (L_2) arranged redundantly thereto, a prioritization
10 information item being included with each packet in a part of the packet header (TOS), characterized in that the relevant packet is conducted either via the transmission facility (L_1) or the transmission facility (L_2) arranged redundantly thereto, as determined by the prioritization
15 information item, and in that in the case of disturbances of the transmission facility (L_1), the packets to be conducted via this facility are conducted via the redundantly arranged transmission facility (L_2).
- 20 2. The method as claimed in claim 1, characterized in that the part of the packet header in which the prioritization information item is included is the TOS field defined in the differentiated services concept.
- 25 3. The method as claimed in claim 1, 2, characterized in that only the packets with lower priority are conducted via the redundantly arranged transmission facility (L_2).
4. The method as claimed in one of the preceding claims,
30 characterized in that the packets with

09-21-2001 199902253
PCT/EP00/06237

- 6a -

EP0006273

lower priority are discarded in the switchover to standby case.

AMENDED SHEET

Abstract

Method for the switchover to standby of transmission facilities in packet-oriented transmission.

In the prior art, information is transmitted via redundant junction lines. This concept cannot be easily applied to the transmission of IP packets. According to the invention, it is provided to use the prioritization information item included in the TOS field with each IP packet for conducting the relevant IP packet either to the active junction line or to the redundant junction line. In the case of a disturbance, the system then switches to the redundant junction line where the IP packets with high priority displace the IP packets with low priority.

FIG. 1

TITLE

5 BACKGROUND OF THE INVENTION

DESCRIPTION OF THE RELATED ART

[0003] This general concept is also applied in the transportation of packet-oriented traffic. As a rule, however, no traffic, or only little traffic, is transmitted via the redundantly arranged junction line, so that it is possible to switch over without losses at any time in the case of a switchover to standby. As a result, however, the transmission capacity is more or less unused on the redundantly arranged junction line. Such a situation must be avoided, particularly for packets which are transmitted in accordance with an Internet Protocol (IP packets).

[0004] The invention is based on the object of providing an approach for how a redundancy of transmission facilities can be made efficient even with IP traffic without having to accept restrictions in the transmission capacity. This is achieved by conducting a packet either via a transmission facility or a redundant transmission facility, as determined by a prioritization information item and conducting a packet determined by the prioritization information item for the transmission facility to the

redundant transmission facility when there is a disturbance of the transmission facility.

[0005] The advantageous feature of the invention is, in particular, the use of a prioritization information item in the TOS field of a packet, because packets with higher priority can be supplied to the active junction line and packets with lower priority can be supplied to the redundant junction line. In the case of a switchover to standby, the packets with higher priority are transmitted via the redundant junction line, displacing the packets with lower priority. This is advantageous because there is always redundancy and the transmission capacity on the redundant junction line can be fully utilized in an error-free operation.

DESCRIPTION OF THE DRAWINGS

[0006] The invention will be explained in greater detail in the text which follows, referring to an exemplary embodiment provided in the Figures.

Figure 1 is a block diagram showing a rigid allocation of the IP traffic to the junction lines as determined by the TOS bits; and

Figure 2 is a block diagram showing an adaptive allocation of the IP traffic.

DETAILED DESCRIPTION OF THE INVENTION

[0007] FIG. 1 shows a configuration in which a method according to the invention is executed. According the method, a junction line L0 is disclosed via which information is transmitted in packets. According to the present exemplary embodiment, the packets are constructed as packets which are transmitted in accordance with an Internet Protocol (IP packets). The IP packets are supplied to a filtering device F via the junction line L0. In this case, a selection is made by way of a marking (described below in greater detail) about which of the subsequent junction lines L1, L2 the relevant IP packet is to be supplied to. Once the selection has been made, the relevant IP packet is first written into a buffer P1 or P2, respectively, allocated to the junction line. The buffers P1 and P2 are associated with a switching device S via which the IP packets are supplied to the junction lines L1, L2. According to the present exemplary embodiment, junction line L1 is intended to be the active junction line and junction line L2 is intended to be the redundant junction line.

[0009] The IP packets have an information part I and a packet header PK. The packet header PK is used for accommodating the destination address and control information, among other things. As a part of this control information, a field TOS is provided which has a width of 8 bits. In the prior art, this field is used within the concept of "Differentiated Services" for including a prioritization information item with IP packets. In case of an overload, the IP packets with lower priority are then discarded, for example, due to this information item.

[0010] The invention distributes the individual IP packets to buffers P1, P2 by evaluating the TOS field. The evaluation is done in the filtering device F and is performed using a predeterminable threshold value. This means that if the value stored in the TOS field is greater than this predetermined threshold value, this IP packet is to be considered as having a higher priority than those IP packets having a value below this threshold value.

[0011] As a result of the evaluation, a distinction is thus made between IP packets with higher priority and IP packets with lower priority. The IP packets with higher priority are conducted via junction line L1, whereas the IP packets with lower priority are supplied to junction line L2. This then also provides an indirect prioritization of the junction lines L1, L2. In the case of a fault, only those IP packets are thus forwarded which are to be considered as having higher priority. The IP packets with lower priority are discarded. In Fig. 1, the IP packets are distributed to the two junction lines L1, L2 by way of a rigid allocation.

[0013] The above-described method is illustrative of the principles of the present invention. Numerous modifications and adaptations will be readily apparent to those skilled in this art without departing from the spirit and scope of the present invention.

~~[Description]~~**SPECIFICATION**

TITLE

METHOD FOR THE SWITCHOVER TO STANDBY OF TRANSMISSION FACILITIES IN PACKET-ORIENTED TRANSMISSION.

BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

[0001] [Method]The invention relates to a method for the switchover to standby of transmission facilities in packet-oriented transmission.

10 ~~[The invention relates to a method]~~~~[according to the preamble of claim 1.]~~

DESCRIPTION OF THE RELATED ART

[0002] To be able to transmit information between a transmitting and receiving facility, it is known to utilize duplicated transmission facilities[are provided in the state of the art]. As a rule, these are constructed as junction lines. In this arrangement, the information is transmitted via only one of these junction lines (an active junction line) as a rule, whereas the remaining junction line is arranged as a redundant junction line. If the active junction line fails, the information is transmitted via the redundant junction line. This procedure ensures that the information can be reliably transmitted even if one junction line fails.

20 **[0003]** This general concept is also applied in the transportation of packet-oriented traffic. As a rule, however, no traffic, or only little traffic, is transmitted via the redundantly arranged junction line, so that it is possible to switch over without losses at any time in the case of a switchover to standby. As a result, however, the transmission capacity is more or less unused on the redundantly arranged junction

25 line. Such a situation must be avoided, particularly for packets which are transmitted in accordance with an Internet Protocol (IP packets).

SUMMARY OF THE INVENTION

[0004] The invention is based on the object of [~~demonstrating~~]**providing** an approach ~~[ef]~~**for** how a redundancy of transmission facilities can be made efficient even with IP traffic without having to accept restrictions in the transmission capacity.

with IP packets. In case of an overload, the IP packets with lower priority are then discarded, for example, due to this information item.

~~[with IP packets. In case of an overload, the IP packets with lower priority are then discarded, for example][due to this information item.]~~

5 **[0010]** ~~[According to the]~~**The** invention~~[, it is then provided to distribute]~~
distributes the individual IP packets to buffers P1, P2 by evaluating the TOS field. The evaluation is done in the filtering device F and is performed ~~[by means of]~~**using** a predeterminable threshold value. This means that if the value stored in the TOS field is greater than this predetermined threshold value, this IP packet is to be
 10 considered as having a higher priority than those IP packets having a value below this threshold value.

[0011] As a result of the evaluation, a distinction is thus made between IP packets with higher priority and IP packets with lower priority. The IP packets with higher priority are conducted via junction line L1, whereas the IP packets with lower
 15 priority are supplied to junction line L2. This then also provides an indirect prioritization of the junction lines L1, L2. In the case of a fault, only those IP packets are thus forwarded which are to be considered as having higher priority. The IP packets with lower priority are discarded. In Fig. 1, the IP packets are distributed to the two junction lines L1, L2 by means of a rigid allocation. A further
 20 development ~~of the method can be seen in~~ way of a rigid allocation.

~~[In Fig. 1, the IP packets are distributed to the two junction lines L1, L2 by][means of a rigid allocation. A further development of the method can be seen in]~~

[0012] A further development of the method can be seen in Fig. 2. According
 25 to this variation, an adaptive method is provided~~[here]~~. Thus, junction line L1 is supplied with exactly such a number of IP packets with higher priority so that a predetermined target capacity utilization is achieved on this junction line. The IP packets with lower priority are conducted to junction line L2. In the case of a switchover due to a fault in junction line L1, ~~[they]~~**the lower priority IP**
 30 **packets** are then lost. The device designated by ST in Fig. 2 is intended for controlling these processes. The threshold value is ~~[here]~~set in accordance with the determination of the capacity utilization of junction line L1,

[illegible]

[0013] The above-described method is illustrative of the principles of the present invention. Numerous modifications and adaptations will be readily apparent to those skilled in this art without departing from the spirit and scope of the present invention.

Abstract

[Abstract]

[Method for the switchover to standby of transmission facilities in packet-oriented transmission.]**ABSTRACT**

5 In the prior art, information is transmitted via redundant junction lines. This concept cannot be easily applied to the transmission of IP packets. ~~[According to the]~~**The** invention~~[-, it is provided to]~~ **provides for** use **of** the prioritization information item included in the TOS field with each IP packet for conducting the relevant IP packet either to the active junction line or to the redundant junction line. In the case of a

10 disturbance, the system then switches to the redundant junction line where the IP packets with high priority displace the IP packets with low priority.

[FIG. 1]

JC13 Res'd PCT/PTO 07 JAN 2002

SUBMISSION OF DRAWINGS

APPLICANT(S):	Joachim CHARZINSKI
ATTORNEY DOCKET NO.:	P01,0563
INTERNATIONAL APPLICATION NO:	PCT/EP00/06273
INTERNATIONAL FILING DATE:	04 JULY 2000
INVENTION:	METHOD FOR THE SWITCHOVER TO STANDBY OF TRANSMISSION FACILITIES IN PACKET-ORIENTED TRANSMISSION

Assistant Commissioner for Patents,
Washington, D C 20231

Sir:

Enclosed is one sheet of drawings (Figures 1-2) for the above-identified PCT application.

Submitted by,

Mark Bergner (Reg. No. 45,877)
Mark Bergner
SCHIFF HARDIN & WAITE
PATENT DEPARTMENT
6600 Sears Tower
Chicago, Illinois 60606-6473
(312) 258-5779
Attorney for Applicant(s)

CUSTOMER NUMBER 26574

1/1

FIG 1


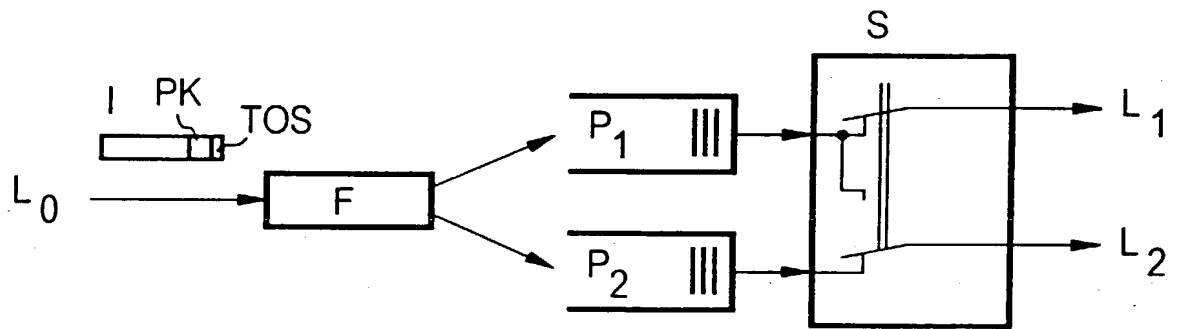


FIG 2

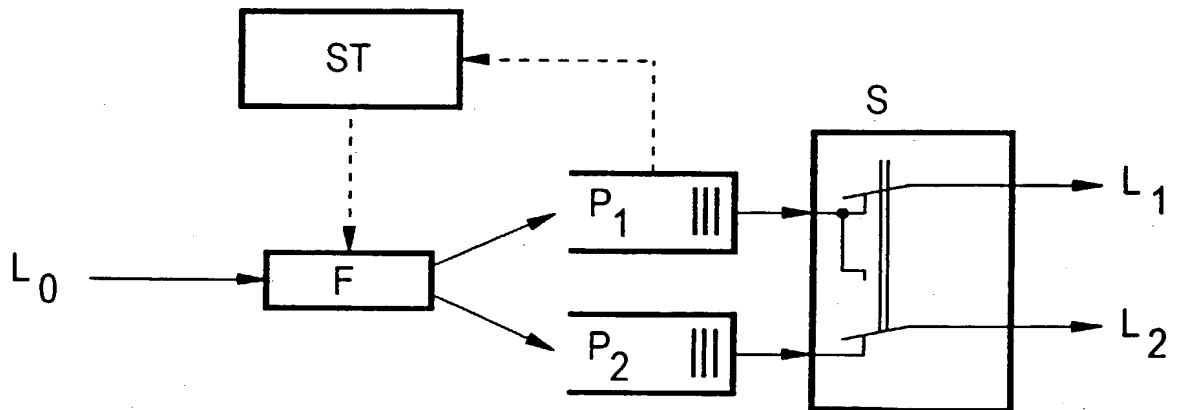

Declaration and Power of Attorney For Patent Application

Erklärung Für Patentanmeldungen Mit Vollmacht

German Language Declaration

Als nachstehend benannter Erfinder erkläre ich hiermit an Eides statt:

dass mein Wohnsitz, meine Postanschrift, und meine Staatsangehörigkeit den im Nachstehenden nach meinem Namen aufgeführten Angaben entsprechen,

dass ich, nach bestem Wissen der ursprüngliche, erste und alleinige Erfinder (falls nachstehend nur ein Name angegeben ist) oder ein ursprünglicher, erster und Miterfinder (falls nachstehend mehrere Namen aufgeführt sind) des Gegenstandes bin, für den dieser Antrag gestellt wird und für den ein Patent beantragt wird für die Erfindung mit dem Titel:

Verfahren zum Ersatzschalten von Übertragungseinrichtungen bei paketorientierter Übertragung

deren Beschreibung

(zutreffendes ankreuzen)

☒ hier beigefügt ist.

☐ am _____ als

PCT internationale Anmeldung

PCT Anwendungsnummer _____

Eingereicht wurde und am _____
abgeändert wurde (falls tatsächlich abgeändert).

Ich bestätige hiermit, dass ich den Inhalt der obigen Patentanmeldung einschliesslich der Ansprüche durchgesehen und verstanden habe, die eventuell durch einen Zusatzantrag wie oben erwähnt abgeändert wurde.

Ich erkenne meine Pflicht zur Offenbarung irgendwelcher Informationen, die für die Prüfung der vorliegenden Anmeldung in Einklang mit Absatz 37, Bundesgesetzbuch, Paragraph 1.56(a) von Wichtigkeit sind, an.

Ich beanspruche hiermit ausländische Prioritätsvorteile gemäss Abschnitt 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 119 aller unten angegebenen Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde, und habe auch alle Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde nachstehend gekennzeichnet, die ein Anmeldedatum haben, das vor dem Anmeldedatum der Anmeldung liegt, für die Priorität beansprucht wird.

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

the specification of which

(check one)

☐ is attached hereto.

☐ was filed on _____ as

PCT international application

PCT Application No. _____

and was amended on _____
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

German Language Declaration

Prior foreign applications
Priorität beansprucht

Priority Claimed

99113240.8	Germany(EP)	06.07.1999	<input checked="" type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Day Month Year Filed)	Yes	No
(Nummer)	(Land)	(Tag Monat Jahr eingereicht)	Ja	Nein
_____	_____	_____	<input type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Day Month Year Filed)	Yes	No
(Nummer)	(Land)	(Tag Monat Jahr eingereicht)	Ja	Nein
_____	_____	_____	<input type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Day Month Year Filed)	Yes	No
(Nummer)	(Land)	(Tag Monat Jahr eingereicht)	Ja	Nein

Ich beanspruche hiermit gemäss Absatz 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 120, den Vorzug aller unten aufgeführten Anmeldungen und falls der Gegenstand aus jedem Anspruch dieser Anmeldung nicht in einer früheren amerikanischen Patentanmeldung laut dem ersten Paragraphen des Absatzes 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 122 offenbart ist, erkenne ich gemäss Absatz 37, Bundesgesetzbuch, Paragraph 1.56(a) meine Pflicht zur Offenbarung von Informationen an, die zwischen dem Anmeldedatum der früheren Anmeldung und dem nationalen oder PCT internationalen Anmeldedatum dieser Anmeldung bekannt geworden sind.

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §122, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

(Application Serial No.)
(Anmeldeseriennummer)

(Filing Date)
(Anmeldedatum)

(Status)
(patentiert, anhängig,
aufgegeben)

(Status)
(patented, pending,
abandoned)

(Application Serial No.)
(Anmeldeseriennummer)

(Filing Date)
(Anmeldedatum)

(Status)
(patentiert, anhängig,
aufgeben)

(Status)
(patented, pending,
abandoned)

Ich erkläre hiermit, dass alle von mir in der vorliegenden Erklärung gemachten Angaben nach meinem besten Wissen und Gewissen der vollen Wahrheit entsprechen, und dass ich diese eidesstattliche Erklärung in Kenntnis dessen abgebe, dass wissentlich und vorsätzlich falsche Angaben gemäss Paragraph 1001, Absatz 18 der Zivilprozessordnung der Vereinigten Staaten von Amerika mit Geldstrafe belegt und/oder Gefängnis bestraft werden koennen, und dass derartig wissentlich und vorsätzlich falsche Angaben die Gültigkeit der vorliegenden Patentanmeldung oder eines darauf erteilten Patentes gefährden können.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

1003010/030258

JC13 Rec'd PCT/PTO 07 JAN 2002

**BOX PCT
IN THE UNITED STATES DESIGNATED/ELECTED OFFICE
OF THE UNITED STATES PATENT AND TRADEMARK OFFICE
UNDER THE PATENT COOPERATION TREATY-CHAPTER II**

CHANGE OF ADDRESS OF APPLICANTS' REPRESENTATIVE

APPLICANT(S): Joachim CHARZINSKI
ATTORNEY DOCKET NO.: P01,0563
INTERNATIONAL APPLICATION NO: PCT/EP00/06273
INTERNATIONAL FILING DATE: 04 July 2000
INVENTION: METHOD FOR THE SWITCHOVER TO STANDBY OF TRANSMISSION
FACILITIES IN PACKET-ORIENTED TRANSMISSION


Assistant Commissioner for Patents,
Washington, D C 20231

S I R:

Members of the firm of Hill & Simpson designated on the original Power of Attorney have merged into the firm of Schiff Hardin & Waite. All future correspondence for the above-referenced application therefore should be sent to the following address:

**SCHIFF HARDIN & WAITE
Patent Department
6600 Sears Tower
233 South Wacker Drive
Chicago, Illinois 60606-6473
CUSTOMER NUMBER 26574**

Submitted by,



(Reg. No. 45,877)
Mark Bergner
SCHIFF HARDIN & WAITE
Patent Department
6600 Sears Tower
Chicago, Illinois 60606-6473
Telephone: (312) 258-5779
Attorneys for Applicants
CUSTOMER NUMBER 26574

$$\frac{1}{\sqrt{\pi}} \int_{-\infty}^{\infty} f(x) e^{-x^2} dx = \frac{1}{\sqrt{\pi}} \int_{-\infty}^{\infty} f(x) e^{-x^2} dx$$

۱۹

And I hereby appoint

Ext. _____

Send Correspondence to:

100